



IS 1

High-tech. Low energy.

Are you looking for an starter model? The IS 1 infrared motion detector comes with perfected technology in unadorned design. It is particularly reliable, can be mounted on the wall or ceiling and is the ideal solution for monitoring areas with precision targeting in front of buildings and on driveways. It also provides excellent quality of detection and can be tailored to the specific conditions on site. The detector is wired up so quickly and easily, there's enough time left for gardening.

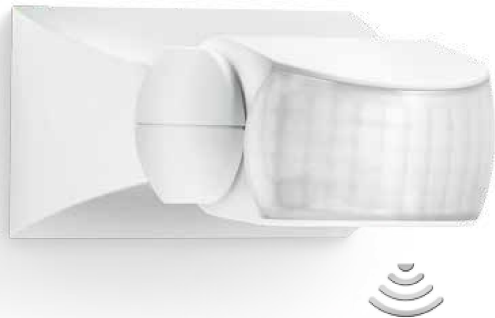

120°, 10m max.

EAN IS 1 white	4007841 600310	CE
EAN IS 1 black	4007841 600419	D'E
Type	motion detector	RoHS
Dimensions (H×W×D)	50 × 80 × 120 mm	
Power supply	230 – 240 V, 50 Hz	
Sensor type	passive infrared	
Where to use	indoors and outdoors	
Installation	wall, ceiling	
Output	max. 500W (resistive load), max. 4 fluorescent lamps / LED lamps, C ≤ 88 µF	
Angle of coverage	120°	
Capability of masking out individual segments	yes	
Swivelling range	60°	
Tilting range	180°	
Reach	max. 10 m	
Twilight setting	2 – 2,000 lx	
Time setting	8 sec – 35 min	
IP rating	IP54	
Protection class	II	

For wall and ceiling mounting



white



black

UV-resistant plastic

